


K5 Scalper

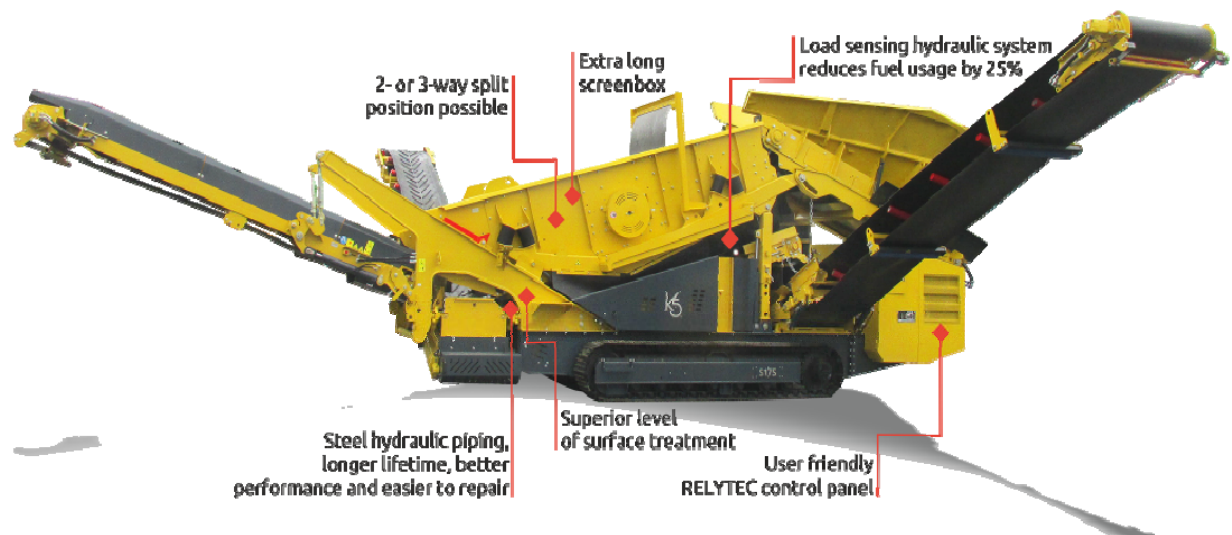

Performance highlights

- Available in full hybrid version
- Standard heavy duty plate apron feeder and hydraulic folding hopper walls
- Double deck screen box 5.000 x 1.500 mm (17' x 5')
- 7,5 m² screening surface upper deck, 6,6 m² lower deck
- Capacity up to 450 tonnes / hour
- Contractor's choice, compact by weight and dimensions
- Optional Double deck Bivitec FLIP FLOW screen box 5.000 x 1.350 mm (17' x 4,5')
- Screening force up to 40 G
- 6,75 m² screening surface upper deck, 5,4 m² lower deck
- Feed hopper 7 m³ (9 yard³), several hopper extensions available
- Low emission engine
- Lowest fuel consumption in the industry
- Large range of screen meshes, fingers, punched plate & grizzly decks available
- Hydraulical liftable screenbox
- Hydraulic adjustable screen angle
- 2 speed track drive
- Extensive option list to configure to your application

Specifications

	Transport Dimensions	Transport Dimensions
Weight:	28.5 t (30 sT)	
Length:	11.296 mm (37'1")	14.450mm (47'5")
Height:	3.330 mm (10'11")	4.380mm (14'4")
Width:	2.850 mm (9'2")	14.010mm (46')